

OMEGA




320 lumens; over 110 lux @ 1 metre



Up to 60% power saving



Unique 'top hat' design for roofstrut integration



Low profile - only 3mm



Quick and easy to install




E-type approved



TECHNICAL SPECS OVERLEAF 
APRIL 2016



DESIGNED FOR MULTI-SECTOR APPLICATIONS

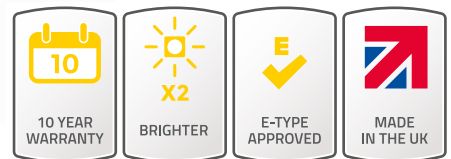

OMEGA


Long life, high intensity Cree Power LEDs - The Omega uses the latest in LED technology, offering optimum performance and extended life, reducing vehicle downtime and the need for costly bulb replacements. The Omega produces 320 lumens of clean white light, providing over 110 lux @ 1 metre, creating a safe working environment.

Excellent light distribution - The lens in the Omega has been designed to spread the LED light over a wide area to ensure that light gets into the darkest corners.

Up to 60% power saving - By using the latest in high efficiency LED technology, the Omega offers a reduction in power consumption of up to 60% compared against standard bulb lighting.

Unique 'top hat' design - The Omega range has been designed to work primarily with the 'Omega' style roof strut, which is common amongst dry freight commercial vehicles. At just 3mm in depth, the Omega keeps obstruction and damage to the minimum.

Quick and easy to install - The light has been designed with 4 fixing points so it can be easily recessed into the roof strut or to one side, depending on the orientation of the strut.

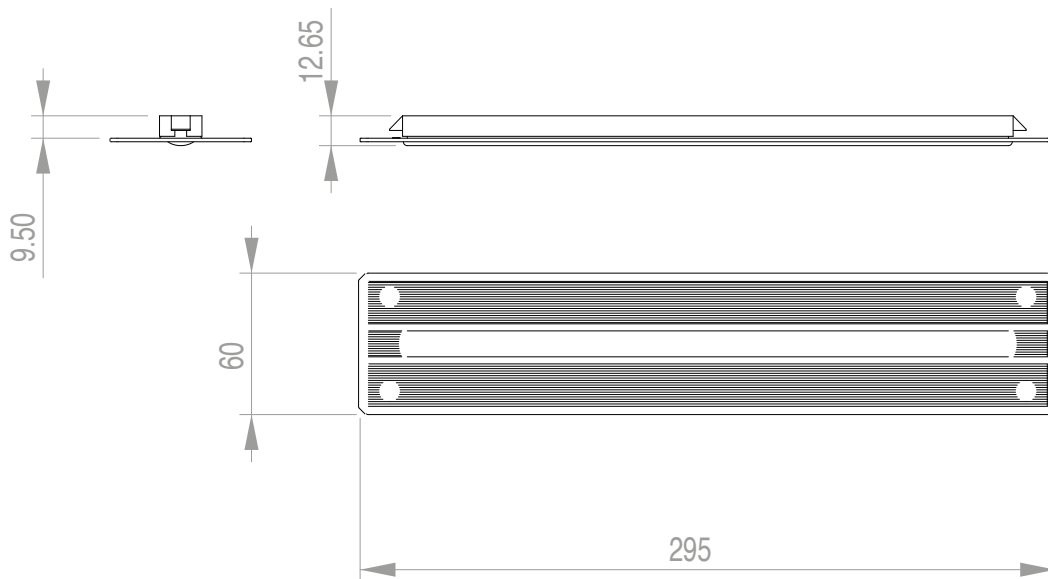

| SPECIFICATION | | ALL DIMENSIONS HAVE A TOLERANCE OF +/-1mm | |
|-----------------|-----|---|----------------|
| | | MX3 (12V) | MX3/2 (24V) |
| Voltage Range | VDC | 10-14 | 20-28 |
| Average Current | A | 0.24 | 0.12 |
| Light Output | lm | 320 | 320 |
| Watts | W | 3W | 3W |
| Weight | kg | 0.09 | 0.09 |
| Temp. Range | °C | -30 to +40 | -30 to +40 |
| IP Rating | IP | IP60 | IP60 |

E & OE

